

SUNDRIES

ACOUSTICAL UNDERLAYMENT



GROUNDWORKS - 157VS (*jumbo roll 172VS*)

- Float or glue LVT/LVP Underlayment
- IIC Rating: 51-71
- STC Rating: 50 - 55
- Decreases step sound in rooms
- Suitable over concrete and wood subfloors
- 100 sq. ft per roll
- 1.4 mm thick



HUSH II - 170VS

- LVT/LVP Underlayment
- IIC Rating: 51
- STC Rating: 56
- Decreases step sound in rooms
- Suitable over concrete and wood subfloors
- 280 sq. ft per roll
- 2.5 mm thick



BRAVO II - 105BU

- LVT/LVP Underlayment
- IIC Rating: 69
- STC Rating: 65
- Closed cell construction for better sound control
- For use over concrete or wood substrates on all grade levels
- 200 sq. ft per roll
- 1 mm thick




SOFSOUND II - HLSFP

- Hardwood and Laminate Underlayment
- IIC Rating: 69
- STC Rating: 66
- Polyethylene Film Moisture and Sound Retardant Barrier
- 200 sq. ft per roll
- 3 mm thick



SILENTSTEP ULTRA - HLSSU

- Hardwood and Laminate Underlayment
- IIC Rating: 72
- STC Rating: 72
- 100% closed cell construction for unsurpassed sound absorption
- For use over concrete or wood substrates on all grade levels
- 100 sq. ft per roll
- 2 mm thick

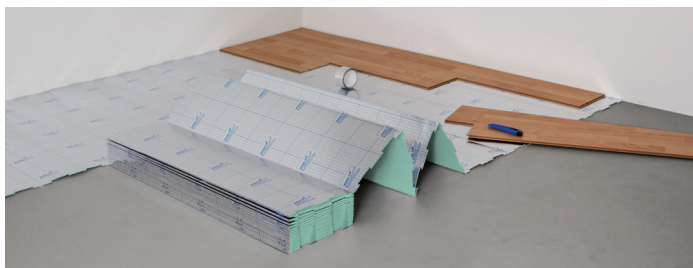

SELITAC - HL100

- Hardwood and Laminate Underlayment
- IIC Rating: 69
- STC Rating: 66
- Superior sound and moisture protection with added thermal insulation
- Seam tape required when installing over concrete subfloors
- 100 sq. ft per box
- 2 mm thick