




MINERAL KING

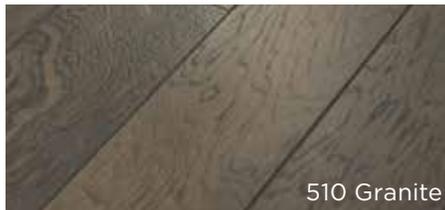

510 Granite

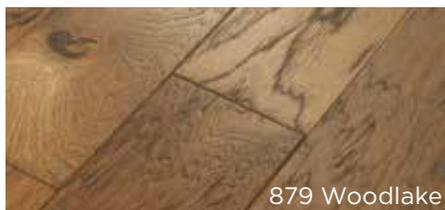

879 Woodlake

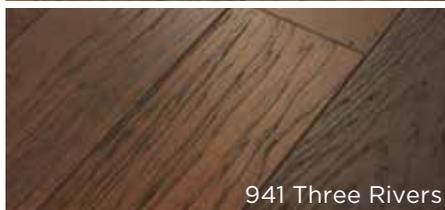


941 Three Rivers




2000 Pacific Crest




2002 Bravo

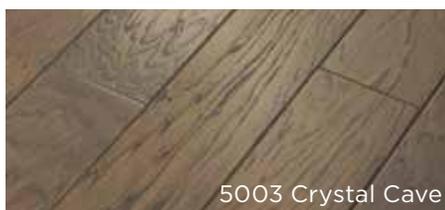

5003 Crystal Cave

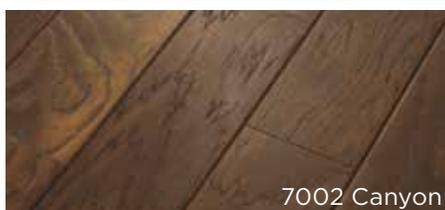

7002 Canyon

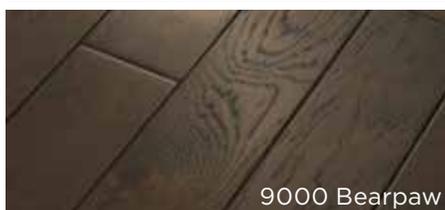

9000 Bearpaw



9000 Bearpaw

Specification

*Cartons may include random lengths

Style	SW558	SW567
Width	5"	6 ³ / ₈ "
Thickness	3/8"	3/8"
Species	Hickory	Hickory
Texture	Wire Brushed	Wire Brushed
Gloss Level	20%	20%
Janka Hardness Rating	2059	2059
Edge Description	Pillowed	Pillowed
End Description	Pillowed	Pillowed
Sq. ft. per carton	19.72	25.40
Sq. ft. per pallet	1,183.20	1,143.00

Features

Featuring a popular wire brushed texture, Mineral King offers just a touch of texture without producing the aggressive results of scraped hardwood floors. This treatment is ideal for homes that want a look that is between smooth and heavy scraped. Pillowed edges and ends give each plank a more pronounced sculpted appearance, which enhances the versatile vintage look. The color palette is rich, offering a wide range of options suitable for traditional or modern setting.


Style	Adhesive	Coverage	Moisture Control	Other
SWADH	UreBond Plus	60 sq. ft./gal	Up to 5 lbs or 85% RH	Most popular
HS105	35MC	60 sq. ft./gal as adhesive	Up to 5 lbs or 85% RH	Sound control & crack suppressant
		35 sq. ft./gal for moisture	Yes, no limit	
HS304	DMC 140	35 sq. ft./gal for moisture	Yes, no limit	

*We recommend that you use Shaw's adhesives to prolong the life, durability and performance of your beautiful new EPIC Plus hardwood floor.

Trim Pieces *when ordering please include color number*



SRW38
Flush
Reducer



SORW8
Overlap
Reducer



SSW38
Flush
Stairnose



SOSW8
Overlap
Stairnose



SCW38
Threshold /
Carpet Reducer



TMW78
T-Molding



QTR96
Quarter
Round



This Shaw EPIC+ hardwood is warranted that the finish will not peel off or wear through for as long as you own your home.



This product features ScufResist™ PLATINUM - Shaw's extremely wear resistant UV cured polyurethane finish with Aluminum Oxide designed to help resist household scuffing on hardwood floors.



Stabilitek core is built for high performance and lasting durability. Constructed from wood fibers bonded with proprietary chemistry, Stabilitek holds up to the challenges of climate fluctuation and sub floor moisture.



This hardwood is rated High color and character variation with distinguishable color variation within each box. It is imperative that hardwood planks from various cartons be continually blended during installation to ensure optimum appearance.



This Shaw hardwood is approved for installation over water type radiant heated subfloors. Floating installation method only. Direct glue-down is NOT recommended!



This Shaw hardwood is Cradle to Cradle™ Silver Certified.



This Shaw product can be installed above, on or below ground level.



Made in the U.S.A.



PRODUCT CERTIFIED FOR LOW CHEMICAL EMISSIONS
UL.COM/GG
UL2818