


Thompson Road




1005 Vista




2007 Plaza

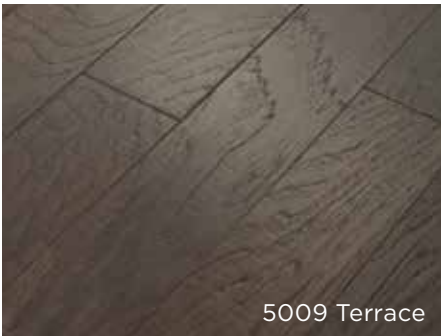

5009 Terrace

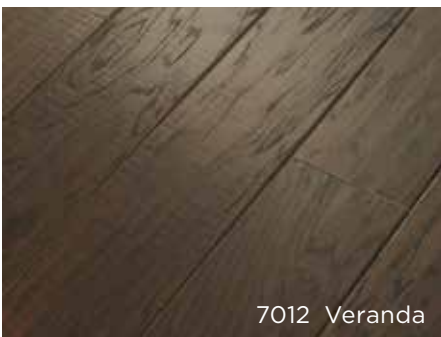

7012 Veranda

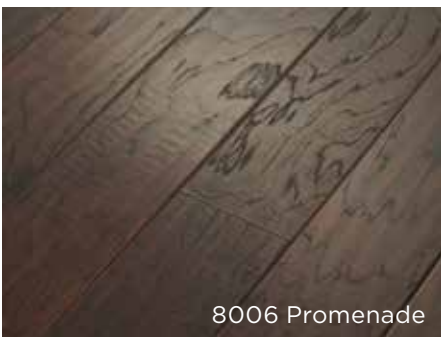

8006 Promenade



1005 Vista

Thompson Road

Specifications

Style	HW544
Thickness	3/8" (9.5mm)
Width	5"
Species	Hickory
Texture	Subtle Scraped
Gloss Level	20%
Janka Hardness Rating	2059
Edge Description	Microbevel
End Description	Microbevel
Sq. ft. per carton	19.72
Sq. ft. per pallet	1,183.20

Cartons may contain random length planks

Features

Thompson Road warms your home with a wide range of color & natural character. The soft, subtle scraped surface creates a gentle alternative to heavy scraped hardwood floors. Beautiful variation is exhibited throughout, highlighting the natural knots, mineral, and aged variation that is sought after in hickory hardwood floors.

Style	Adhesive	Coverage	Moisture Control	Other
HWADH	UreBond Plus	60 sq. ft./gal	Up to 5 lbs or 85% RH	Most popular
HWA05	35MC	60 sq. ft./gal as adhesive	Up to 5 lbs or 85% RH	Sound control & crack suppressant
		35 sq. ft./gal for moisture	Yes, no limit	
HS303	DMC 140	35 sq. ft./gal for moisture	Yes, no limit	

**We recommend that you use Shaw's adhesives to prolong the life, durability and performance of your beautiful new EPIC Plus hardwood floor.*



This Shaw Duras hardwood is warranted that the finish will not peel off or wear through for 50 years.



This product features ScufResist™ PLATINUM – Shaw's extremely wear resistant UV cured polyurethane finish with Aluminum Oxide designed to help resist household scuffing on hardwood floors.



Stabilitek core is built for high performance and lasting durability. Constructed from wood fibers bonded with proprietary chemistry, Stabilitek holds up to the challenges of climate fluctuation and sub floor moisture.



This hardwood is rated High color and character variation with distinguishable color variation within each box. It is imperative that hardwood planks from various cartons be continually blended during installation to ensure optimum appearance.



This Shaw hardwood is approved for installation over water type radiant heated subfloors. Floating installation method only. Direct glue-down is NOT recommended!



This Shaw hardwood is Cradle to Cradle™ Silver Certified.



This Shaw product can be installed above, on or below ground level.



Made in the U.S.A.



PRODUCT CERTIFIED FOR LOW CHEMICAL EMISSIONS
UL.COM/GG
UL2818

Trim Pieces *when ordering please include color number*



HRH38
Flush
Reducer



HOR38
Overlap
Reducer



HSH38
Flush
Stairnose



HOSH8
Overlap
Stairnose



HCH38
Threshold /
Carpet Reducer



HWTMH
T-Molding



HWQRO
Quarter
Round