



140 Shroud



500 Reveal



510 Screen



570 Mask



150 Cloak

Style Number	SA944	SA948	SA945
Construction	color body porcelain	color body porcelain	color body porcelain
Tile Type	floor tile	bullnose	basketweave mosaic
Tile Size	12" × 24"	3" × 24"	12" × 12" × 2" × 2"

Technical


Wear Rating Group	4	4	4
Break Strength	≥ 450	≥ 450	≥ 450
Water Absorption	≤ 0.5%	≤ 0.5%	≤ 0.5%
DCOF	≥ 0.42	≥ 0.42	≥ 0.42
Shade Variation	V1	V1	V1

A DCOF value of > 0.42 is the new standard for tiles specified for commercial application in standard A137.1-2012, Section 9.6. It replaces the SCOF value of > 0.60 referenced in ASTM C1028. For more information on the correlation between the two values and about the DCOF AcuTest visit the Tile Council of North America's website: www.tcnatile.com


MANUFACTURER'S WARNING:

- Tiles with DCOF AcuTest values less than .42 are not recommended for use in areas with wet or slippery conditions. If such tiles are used as a walking surface where water, ice, oil, grease and/or other substances are present, such a condition could cause a reduction in foot traction and become unexpectedly slippery resulting in a fall and personal injury. See ANSI standard A137.1 section 6.2.2.1.10, available at www.tcnatile.com/sections6.2.2.1.10.html.
- Water, oil, grease, etc. create slippery conditions. Floor applications with exposure to these conditions require extra caution in product selection. Not for use on ramps.
- For additional information, refer to [Factors to Consider](#).
- Since there is a shade variation on all natural products, the tile and trim supplied for your particular installation may not match these samples. Final selection should be made from actual tiles and trim and not from tile and trim samples or color reproductions. Manufactured in accordance with ANSI A137.1 standards.


Colors

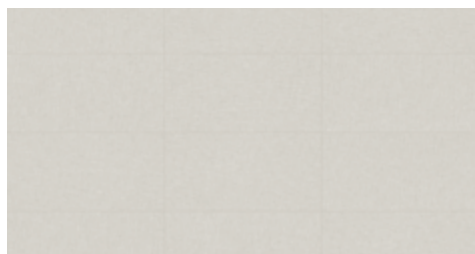


140 Shroud

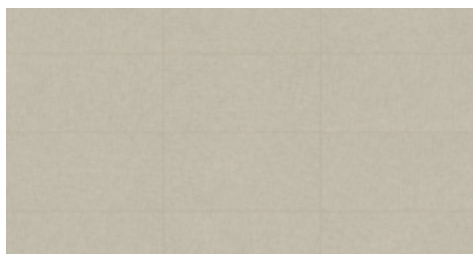

150 Cloak

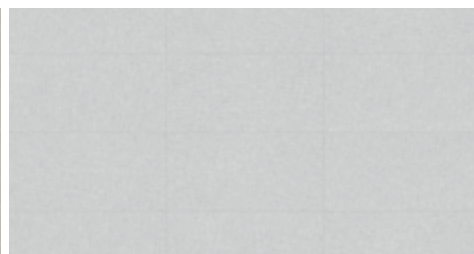

500 Reveal

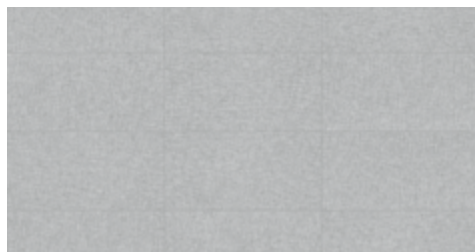

510 Screen



570 Mask

Benefits

