




shawbuilderflooring.com duras



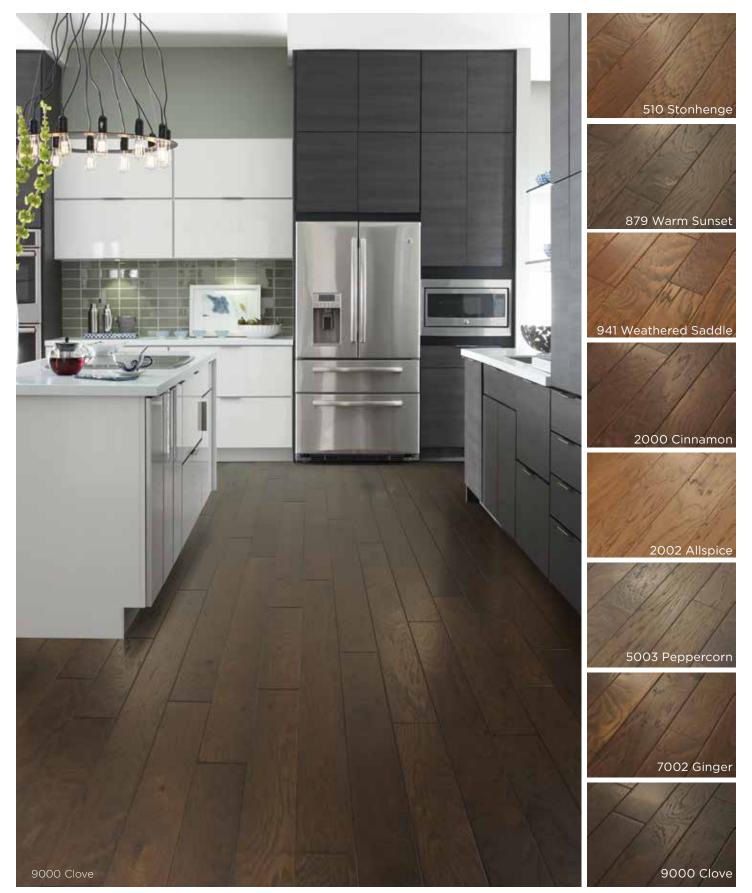

## Kings Canyon duras

# Features

Featuring a popular wire brushed texture, this style creates a rustic, time-worn visual that's highly sought for today's homes. Pillowed edges and ends give each plank a more pronounced sculpted effect, which enhances the versatile vintage look. The color palette is rich, offering a wide range of options suitable for traditional or modern settings




### Trim Pieces when ordering please include color number





HRW38 Flush Reducer

HROW8 **Overlap Reducer** 



HWTMW

T-Molding



HSOW8 Flush Stairnose Overlap Stairnose



HWQR0 Quarter Round



#### HW558

Thickness	3/8" (9.5mm)
Width	5″
Species	Hickory
Texture	Wire Brushed
Gloss Level	20%
Janka Hardness Rating	1835
Edge Description	Pillowed
End Description	Pillowed
Sq. ft. per carton	19.72
Sq. ft. per pallet	1,183.20

Cartons may contain random length planks



RADIANT

HEAT

Style

This Shaw Duras hardwood is warranted that the finish will not peel off or wear through for 50 years.

This Shaw hardwood is approved for installation over water type radiant heated subfloors. Floating installation method only. Direct glue-down is NOT recommended!



This product features ScufResist™ PLATINUM - Shaw's extremely wear resistant UV cured polyurethane finish with Aluminum Oxide designed to help resist household scuffing on hardwood floors.



This hardwood is rated High color and character variation with distinguishable color variation within each box. It is imperative that hardwood planks from various cartons be continually blended during installation to insure optimum appearance.



This Shaw hardwood meets the GREENGUARD indoor air quality requirements and is GREENGUARD Certified.

This Shaw hardwood is Cradle to Cradle<sup>CM</sup> Silver Certified.



This Shaw product can be installed above, on or below ground level.



Made in the U.S.A.

# Suggested Adhesive

HCW38

Threshold / Carpet Reducer

- HS303 Shaw DMC140 (premium urethane adhesive) No moisture testing required
- HWADH Shaw Urebond Plus Adhesive Slab moisture up to 80% RH / 8 lbs
- HS305 Shaw U60 Adhesive Slab moisture up to 75% RH / 3 lbs
- BTGAD Shaw Tongue and Groove Adhesive Formulated for floating installations