

# Thames Hickory

shawfloors.com



1002 Abingdon



2004 Brey



7004 Eton




1002 Abingdon

## Features

Thames Hickory makes a striking fashion statement for today's home. The look is inspired by the centuries-old liming technique, originated by European artisans in art houses along the Thames River. Subtle shifts in grey and white wash over each plank, settling deep in the wire brushed wood grain, creating a contrasting softness that accentuates the natural wood grain and character. No two planks are alike, making your floor a one-of-a-kind work of art.

## Trim Pieces *when ordering please include color number*

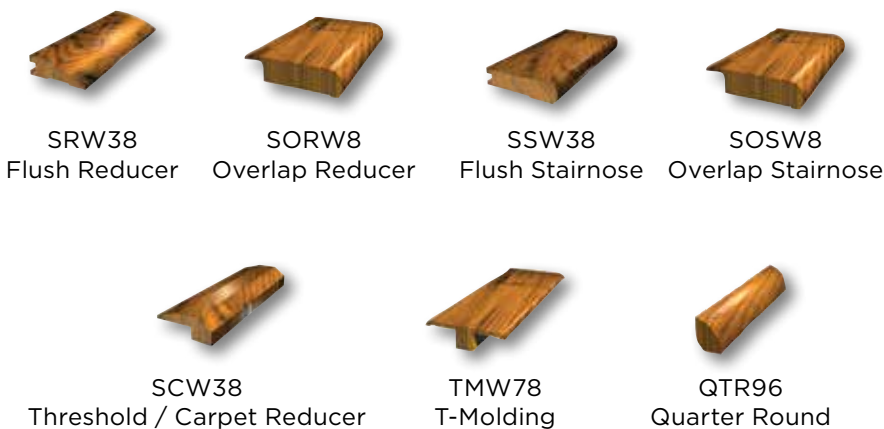

## Suggested Adhesive

- **HS304** Shaw DMC140 (*premium urethane adhesive*)  
No moisture testing required
- **SWADH** Shaw Urebond Plus Adhesive  
Slab moisture up to 80% RH / 8 lbs
- **HS306** Shaw U60 Adhesive  
Slab moisture up to 75% RH / 3 lbs
- **TNGAD** Shaw Tongue and Groove Adhesive  
Formulated for floating installations

## Specifications

<b>Style</b>	<b>SW553</b>
Thickness	3/8" (9.5mm)
Width	6 <sup>3</sup> / <sub>8</sub> "
Species	Hickory
Texture	Limed
Gloss Level	7%
Janka Hardness Rating	1835
Edge Description	Microbevel
End Description	Microbevel
Sq. ft. per carton	25.40
Sq. ft. per pallet	1,143.00

*Cartons may contain random length planks*



This Shaw Epic+ hardwood is warranted that the finish will not peel off or wear through for as long as you own your home.



This product features ScufResist™ PLATINUM - Shaw's extremely wear resistant UV cured polyurethane finish with Aluminum Oxide designed to help resist household scuffing on hardwood floors.



The leader in strong, stable and durable HDF core. Comprised of interlocking wood fibers, our Stabilithek core allows our EPIC Plus hardwoods to expand and contract with the changing seasons.



This hardwood is rated High color and character variation with distinguishable color variation within each box. It is imperative that hardwood planks from various cartons be continually blended during installation to insure optimum appearance.



This Shaw hardwood is approved for installation over water type radiant heated subfloors. Floating installation method only. Direct glue-down is NOT recommended!



This Shaw hardwood meets the GREENGUARD indoor air quality requirements and is GREENGUARD Certified.



This Shaw hardwood is Cradle™ Silver Certified.



This Shaw product can be installed above, on or below ground level.



Made in the U.S.A.