


Five Points / engineered

shawfloors.com

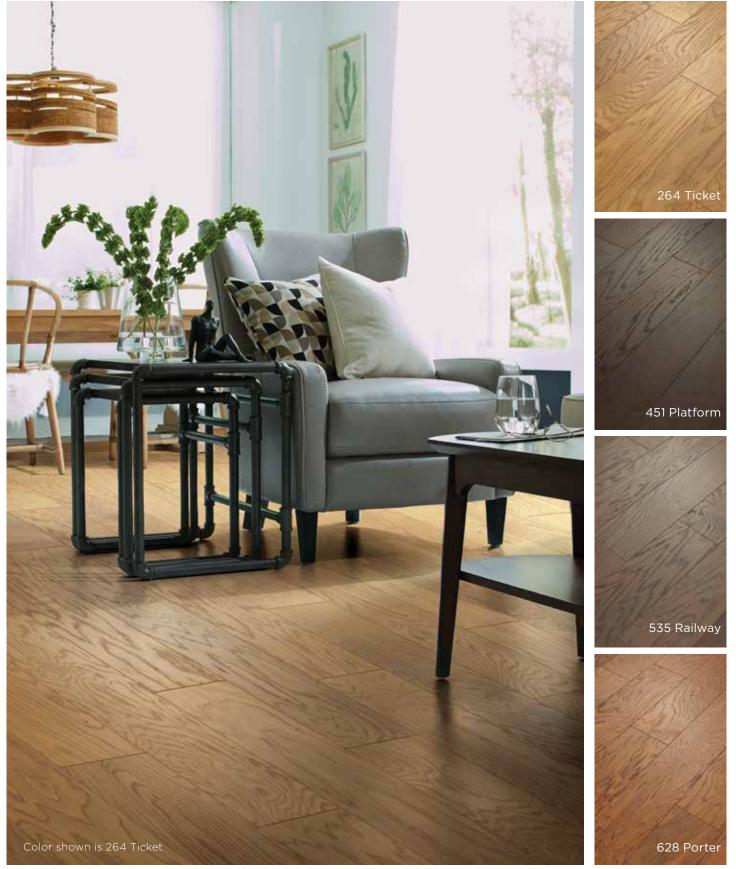

Shaw Hardwoods FI OORS Five Points / engineered

Features

An elegant 7" wide plank wire brushed white oak with low gloss matte finish. The subtle wire brushing help accentuate the pronounced white oak grain. This wire brushing along with the low gloss matte finish create the old world elegant look of an oil rubbed finish without all the extra maintenance cost and hassle of oil rubbed. This product comes in 4 distinct colors including a white oak natural, a trending gray brown, a deep espresso brown and a warm reddish brown tone.

Trim Pieces when ordering please include color number

Specifications

Style

2	
Thickness	1/2" (12.6mm)
Width	7"
Species	White Oak
Texture	Wire Brushed
Gloss Level	10%
Janka Hardness Rating	1210
Edge Description	Microbeveled
End Description	Microbeveled
Sq. Ft. per Carton	28.58
Sq. Ft. per Pallet	1,200.36

Cartons may include random lengths

SW505




This Shaw engineered® hardwood is warranted that the finish will not peel off or wear through for as long as you own your home.





SRH12 Flush Reducer

SORH2 Overlap Reducer



- SOSH2 **Overlap Stairnose**



installation over water type radiant heated subfloors. Floating installation method only. Direct glue-down is NOT recommended!

This Shaw hardwood is approved for



This hardwood is rated Moderate color and character variation with distinctive color variation within each box. It is *imperative* that hardwood planks from various cartons be continually blended during installation to insure optimum appearance.



This Shaw hardwood meets the GREENGUARD indoor air quality requirements and is GREENGUARD Certified.



Cradle to Cradle Certified™ Products Program. This product is Cradle to Cradle Certified™ Silver.



This Shaw product can be installed above, on or below ground level.

SCH12 Threshold / Carpet Reducer



TMH78 T-Molding



QTR96 Quarter Round



- HS091 Shaw 4-in-1 Urethane Adhesive - Slab moisture up to 85% RH / 12 lbs
- HS097 Shaw 3-in-1 MS Adhesive - Slab moisture up to 90% RH / 15 lbs
- HS105 Shaw 35MC Urethane Adhesive - Slab moisture up to 90% RH / 15 lbs
- SWADH Shaw UreBond Plus Urethane Adhesive - Slab moisture up to 80% RH / 8 lbs

- HS090 Shaw EcoMade Resin Adhesive - Slab moisture up to 75%RH / 3 lbs
- HS096 Shaw 70 Adhesive Resin Adhesive - Slab moisture up to 75%RH / 3 lbs
- TNGAD Shaw Tongue and Groove Adhesive - Formulated for floating installations