


SYMPHONIC

engineered





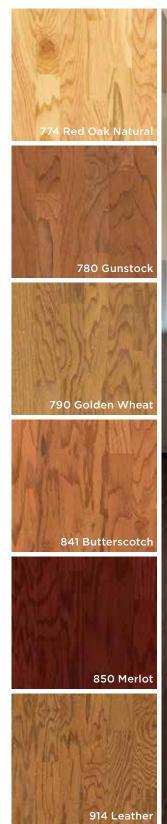

SYMPHONIC



Style Number	SW119	SW120	
Construction	Stabilitek Core	Stabilitek Core	
Thickness	3/8"	3/8"	
Width	31/4"	5"	
Species	Red Oak	Red Oak	
Texture	Smooth	Smooth	
Gloss Level	40%	40%	
Janka Hardness Rating	1802	1802	
Edge Description	Microbeveled	Microbeveled	
End Description	Microbeveled	Microbeveled	
SF per carton	19.80	19.72	
SF per pallet	1,188.00	1,183.20	
Installation	Nail, Staple, Glue, Float	Nail, Staple, Glue, Float Cartons may include random lengths	

Features

- Classic oak flooring in a smooth full-filled finish
- · Color palette offers seven traditional shades
- Available in two widths 3½" and 5"

Sundry Recommendations

Style #	Style Name	Coverage	Moisture Test	Additional Features	
ADHESIVES					
HS105	35MC — Urethane	35 SF / gal for moisture	No Moisture test required	Sound control & crack suppressant	
		60 SF / gal as adhesive	Up to 5 lbs. or 85% RH		
111SA	3-in-1 Ultra — MS	35 SF / gal for moisture	No Moisture test required	Sound control & crack suppressant	
		70 SF / gal as adhesive	Up to 5 lbs. or 85% RH		
HS304	DMC140 — Urethane	35 SF / gal for moisture	No Moisture test required		
SWADH	UreBond Plus	35 SF / gal for moisture	Up to 8 lbs. or 85% RH		
		60 SF / gal	Up to 5 lbs. or 85% RH		

Trim Pieces length: 78" (*Overlap Reducer and Overlap Stairnose are designed for floating installations only. These items are non-stocking — but are available through a quick-ship program. **Deliver should take approximately 2 to 3 weeks**.)











SW838 Threshold | Carpet Reducer



SW839 T-Molding



SW836 Quarter Round

Benefits

Reducer







Reducer













