



2005 Buckskin



3000 Bison



5002 Timberwolf



8003 Moccasin


5002 Timberwolf

Features

Awesome Maple offers stunning style. Combining maple's softly subtle grain with heavy scraping creates a look that's high in character and visually cool. 3/8" thick and 5" wide, the planks have micro-beveled edges and ends. Just the floor for relaxed family living.

- This product features ScufResist™ PLATINUM—Shaw's extremely wear-resistant UV-cured polyurethane finish with aluminum oxide. The new and improved ScufResist™ PLATINUM is designed to help resist household scuffing on hardwood floors.
- This product can be installed above, on, or below ground level.
- Made by Shaw with pride in the USA.

Trim Pieces *when ordering please include color number*

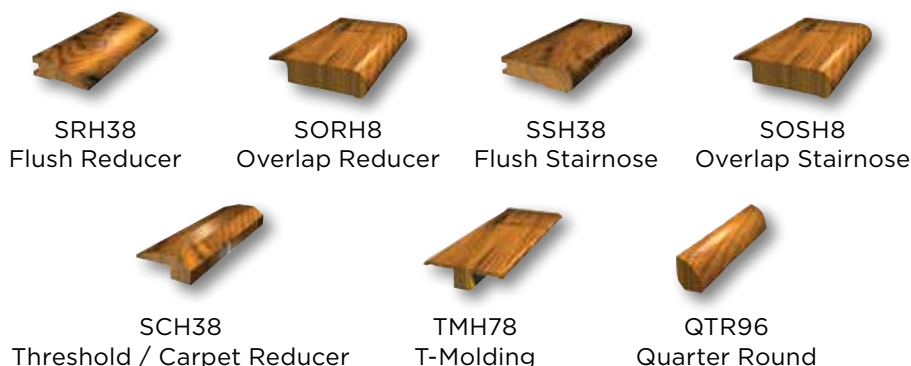

Suggested Adhesive

- HS091 – Shaw 4-in-1 Urethane Adhesive – Slab moisture up to 85% RH / 12 lbs
- HS097 – Shaw 3-in-1 MS Adhesive – Slab moisture up to 85% RH / 10 lbs
- HS105 – Shaw 35MC Urethane Adhesive – Slab moisture up to 90% RH / 15 lbs
- SWADH – Shaw UreBond Plus Urethane Adhesive – Slab moisture up to 80% RH / 8 lbs
- HS090 – Shaw EcoMade Resin Adhesive – Slab moisture up to 75%RH / 3 lbs
- HS096 – Shaw 70 Adhesive Resin Adhesive – Slab moisture up to 75%RH / 3 lbs
- TNGAD – Shaw Tongue and Groove Adhesive – Formulated for floating installations

Specifications

Style	SA455
Thickness	3/8" (10mm)
Width	5"
Species	Maple
Texture	Heavy Scraped
Gloss Level	20%
Janka Hardness Rating	2039
Edge Description	Microbeveled
End Description	Microbeveled
Sq. ft. per carton	19.72
Sq. ft. per pallet	1,183.20

Cartons may contain random length planks



This Shaw Epic® hardwood is warranted that the finish will not peel off or wear through for as long as you own your home.



This product features ScufResist™ PLATINUM – Shaw's extremely wear resistant UV cured polyurethane finish with Aluminum Oxide designed to help resist household scuffing on hardwood floors.



This Shaw Epic® hardwood is made with Shaw's EnviroCore® and provides unsurpassed structural integrity, impact resistance and dimensional stability.



This hardwood is rated High color and character variation with distinguishable and often extreme color variation within each box. It is *imperative* that hardwood planks from various cartons be continually blended during installation to ensure optimum appearance.



This Shaw hardwood is approved for installation over water type radiant heated subfloors. Floating installation method only. Direct glue-down is NOT recommended!



This Shaw hardwood meets the GREENGUARD indoor air quality requirements and is GREENGUARD Certified.



This Shaw hardwood is Cradle to CradleCM Silver Certified.



This Shaw product can be installed above, on or below ground level.



This Shaw product is Made in the U.S.A.