


Features

Yukon Maple Mixed offers stunning style. Combining maple's softly subtle grain with heavy scraping creates a look that's high in character and visually cool. 3/8" thick and varying widths, the planks have pillowed edges and ends. Just the floor for relaxed family living.

Yukon Maple Mixed makes it easier to install a mixed width floor. With all three widths packaged together in the same carton (3 1/4", 5" and 6 3/8"), there are no confusing calculations to perform. Yukon Maple is also available in single width planks as well:

- SW547 Yukon Maple 5"
- SW548 Yukon Maple 6 3/8"

Trim Pieces *when ordering please include color number*

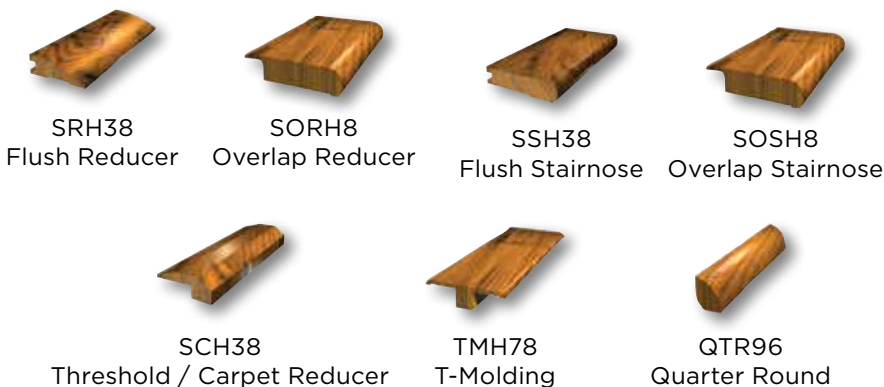

Suggested Adhesive

- HS304 Shaw DMC140 (*premium urethane adhesive*)
No moisture testing required
- HS105 Shaw 35MC Urethane Adhesive
Moisture and Sound Control - No moisture testing required.
- SWADH Shaw Urebond Plus Adhesive
Slab moisture up to 80% RH / 8 lbs
- TNGAD Shaw Tongue and Groove Adhesive
Formulated for floating installations

Specifications

Style	SW549
Thickness	3/8" (9.5mm)
Width	3 1/4", 5", 6 3/8" mixed
Species	Maple
Texture	Heavy Scraped
Gloss Level	20%
Janka Hardness Rating	2039
Edge Description	Pillowed
End Description	Pillowed
Sq. ft. per carton	29.10
Sq. ft. per pallet	1309.50

Cartons may contain random length planks



This Shaw Epic+ hardwood is warranted that the finish will not peel off or wear through for as long as you own your home.



This product features ScufResist™ PLATINUM - Shaw's extremely wear resistant UV cured polyurethane finish with Aluminum Oxide designed to help resist household scuffing on hardwood floors.



The leader in strong, stable and durable HDF core. Comprised of interlocking wood fibers, our Stabilitek core allows our EPIC Plus hardwoods to expand and contract with the changing seasons.



This hardwood is rated High color and character variation with distinguishable color variation within each box. It is imperative that hardwood planks from various cartons be continually blended during installation to insure optimum appearance.



This Shaw hardwood is approved for installation over water type radiant heated subfloors. Floating installation method only. Direct glue-down is NOT recommended!



This Shaw hardwood meets the GREENGUARD indoor air quality requirements and is GREENGUARD Certified.



This Shaw hardwood is Cradle™ Silver Certified.



This Shaw product can be installed above, on or below ground level.



Made in the U.S.A.